



UTS-1 dimensions

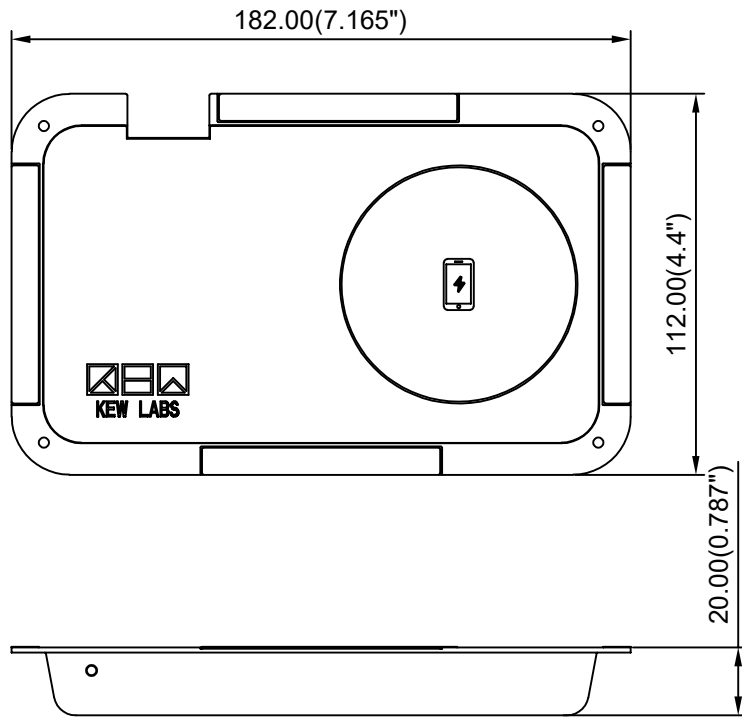


Thin Charging Distance : 10 ~ 17mm (0.393" ~ 0.669")
Standard Charging Distance : 18 ~ 25.4mm (0.70" ~ 1.0")

For best results and universal compatibility - Kew Labs recommends working towards "thin" specification.


Routing depth

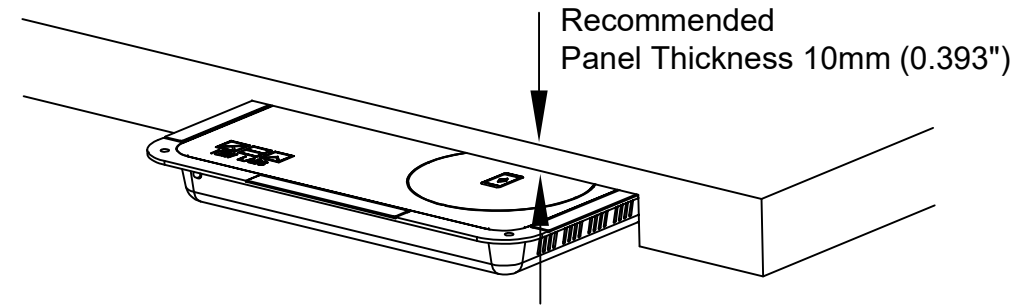

Align UTS-1

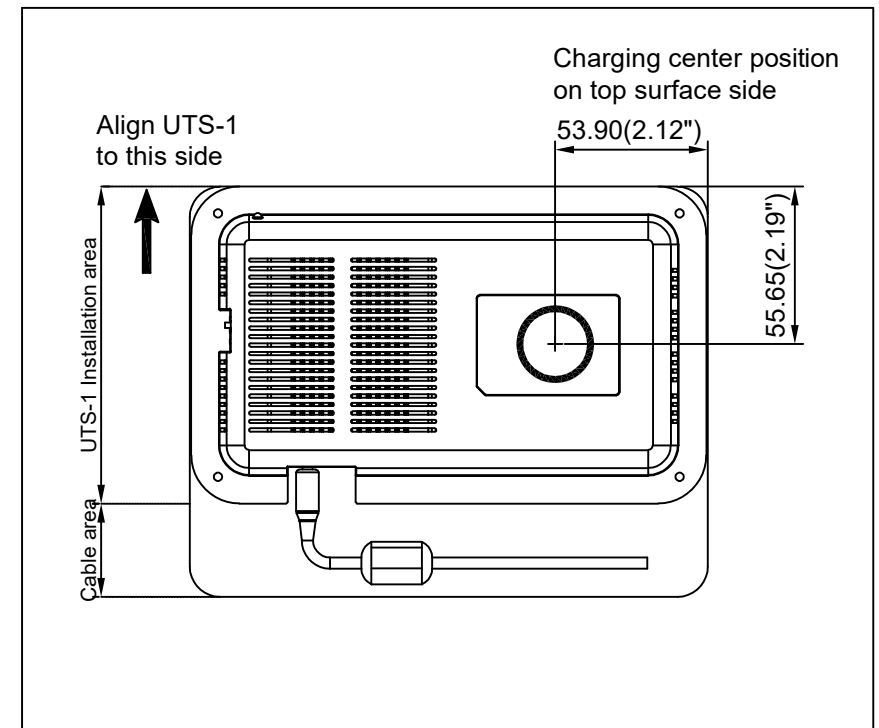

Single unit routing

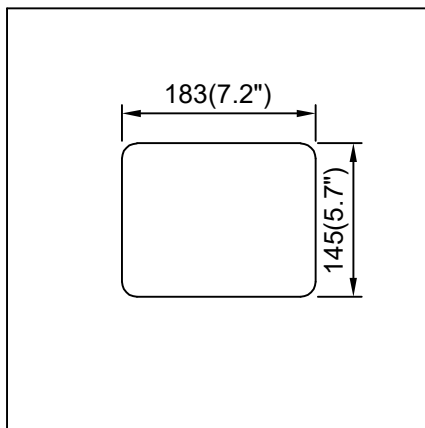

Daisy chain unit routing

